



## LOGISTIC

# STABUFILM®

Non-slip plastic insert  
Stabilizes palletized loads



### APPLICATIONS

- ▶ Stabilizes all types of products with irregular surfaces
- ▶ Very effective for stabilizing buckets, cans, jerry cans ... palletized in columns
- ▶ Suitable for environments where fibers are not permitted
- ▶ Suitable for lacquered and scratch-sensitive surfaces
- ▶ Stabilizes products stored outdoors
- ▶ Plastic pallets
- ▶ Positioned at the foot of the pallet, in the layer pad and on the pallet cap
- ▶ Product used in manual laying or on automatic palletizing line

### PROPERTIES

- ▶ Very high coefficient of friction, anti-slip film
- ▶ Water and moisture barrier, hydrophobic, waterproof
- ▶ High puncture and tear resistance
- ▶ Non-abrasive
- ▶ Flexible and deformable, allows nesting and stacking of packages
- ▶ Fiberless, hygienic, aseptic, prevents contamination
- ▶ Transparent

### STANDARD PACKAGING

- ▶ 1,200 mm-wide rolls adapted to the pallet format
- ▶ 300 ml in 65 µ and 200 ml in 100 µ
- ▶ Pre-cut rolls at 800, 1,000 mm
- ▶ OTHER widths, lengths, thicknesses and colors
- ▶ on request for use on automatic cutting machines

## TECHNICAL DATA

Support	Film PEmd		Standards
Thickness µm	65 and 100		Internal test
CONTACT SURFACES	STABUFILM® on plastic	STABUFILM® on paper	
Static friction coefficient	0,9	0,8	ISO 15 359
Dynamic friction coefficient	0,9	0,8	ISO 15 359

Certifications ISO 9001 et ISO 22000 - Laboratoire de contrôle, service de Recherche & Développement




solution@cgp-coating.com - www.cgp-coating.com



LOGISTIC

# STABUFOOD®

Non-slip plastic insert stabilizes food products

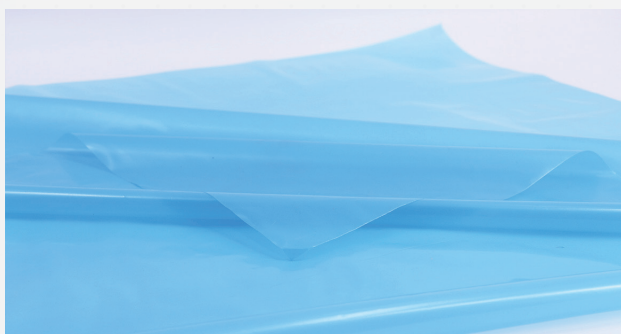

## APPLICATIONS

- ▶ Specially designed for the food industry and aseptic environments where fibers and dust are prohibited
- ▶ Suitable for cold storage or freezers
- ▶ Plastic pallets
- ▶ Stabilizes all types of products with irregular surfaces
- ▶ Very effective for stabilizing buckets, cans and jerry cans palletized in columns
- ▶ Positioned at the foot of the pallet, in the layer pad and on the pallet cap
- ▶ Product used in manual laying or on automatic palletizing line

## PROPERTIES

- ▶ Very high coefficient of friction, anti-slip film
- ▶ Direct food contact: certificate on request
- ▶ Water and moisture barrier, hydrophobic, waterproof
- ▶ Freeze resistant
- ▶ High puncture and tear resistance
- ▶ Flexible and deformable, allows nesting and stacking of packages
- ▶ Fiberless, hygienic, aseptic, prevents contamination
- ▶ Clear or Blue

## STANDARD PACKAGING

- ▶ 1,200 mm-wide rolls adapted to the pallet format
- ▶ 300 ml in 65  $\mu$  and 200 ml in 100  $\mu$
- ▶ Pre-cut rolls at 800, 1,000 mm
- ▶ OTHER widths, lengths, thicknesses and colors on request for use on automatic cutting machines

## TECHNICAL DATA

Support	Film PEmd		Standards
Thickness $\mu$ m	65 and 100		Internal test
<b>CONTACT SURFACES</b>	<b>STABUFOOD® on plastic</b>	<b>STABUFOOD® on paper</b>	
Static friction coefficient	0,9	0,8	ISO 15 359
Dynamic friction coefficient	0,9	0,8	ISO 15 359

Certifications ISO 9001 et ISO 22000 - Laboratoire de contrôle, service de Recherche & Développement



solution@cgp-coating.com - www.cgp-coating.com